



3/22/05

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of : Peter THIESSEN
Serial no. : 10/730,306
Filed : December 8, 2003
For : A HOOP FOR A SAFETY CAGE ASSEMBLY OF
A LADDER
Group Art Unit : 3634
Examiner : Hugh B. THOMSON
Docket : THOLAM P218US

MAIL STOP ISSUE FEE

The Commissioner for Patents
U.S. Patent & Trademark Office
P. O. Box 1450
Alexandria, VA 22313-1450


SUBMISSION OF CERTIFIED COPY

Dear Sir:

A claim for priority is hereby made under the provisions of 35 U.S.C. § 119 for the above-identified United States Patent Application based upon Canada Patent Application No. 2,416,390 filed January 16, 2003. A certified copy of said Canada application is enclosed herewith.

In the event that there are any fee deficiencies or additional fees are payable, please charge the same or credit any overpayment to our Deposit Account (Account No. 04-0213).

Respectfully submitted,

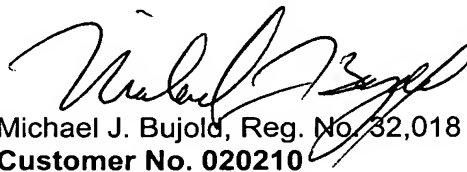

Michael J. Bujold, Reg. No. 32,018
Customer No. 020210
Davis & Bujold, P.L.L.C.
Fourth Floor
500 North Commercial Street
Manchester NH 03101-1151
Telephone 603-624-9220
Facsimile 603-624-9229
E-mail: patent@davisandbujold.com



**Office de la propriété
intellectuelle
du Canada**

Un organisme
d'Industrie Canada

**Canadian
Intellectual Property
Office**

An Agency of
Industry Canada

*Bureau canadien
des brevets*
Certification

*Canadian Patent
Office*
Certification

La présente atteste que les documents
ci-joints, dont la liste figure ci-dessous,
sont des copies authentiques des docu-
ments déposés au Bureau des brevets.

This is to certify that the documents
attached hereto and identified below are
true copies of the documents on file in
the Patent Office.

Specification and Drawings, as originally filed, with Application for Patent Serial No:
2,416,390, on January 16, 2003, by **CAGE INDUSTRIES LTD.**, assignee of Peter
Thiessen, for "A Hoop for a Safety Cage Assembly of a Ladder".


Agent certificateur/Certifying Officer

February 1, 2005

Date

Canada

(CIPO 68)
31-03-04

OPIC  CIPO

ABSTRACT OF THE DISCLOSURE

A hoop for a safety cage assembly of a ladder includes a rigid arcuate band having a first face, a second face, a first end and a second end. Each of the first end and the
5 second end are secured to a ladder. A plurality of keyhole openings extend through the band between the first face and the second face. A plurality of detachable tubing clamps are provided. Each of the tubing clamps has tubing receiving jaws defining a tubing receiving opening with an axis. The tubing
10 receiving jaws have an exterior mounted projecting attachment key. In a first orientation, the attachment key passes freely in and out through a selected one of the keyhole openings in the band. In a second orientation, the attachment key is locked within the selected keyhole opening
15 and the tubing receiving jaws are oriented with the axis of the tubing receiving opening positioned transversely in relation to the band.

TITLE OF THE INVENTION:

A Hoop For A Safety Cage Assembly Of A Ladder

FIELD OF THE INVENTION

5 The present invention relates to a hoop for a safety cage assembly of a ladder

BACKGROUND OF THE INVENTION

10 Safety cage assemblies for scaffolding ladders generally consist of a plurality of hoops which are secured transversely to the ladder at regular spaced intervals. Scaffolding tubes are then secured to the hoops, so that the scaffolding tubes extend parallel to the ladder. The scaffolding tubes enclose the spaces between the hoops to
15 provide fall protection. Hoops presently in use have tubing clamps welded to them. This makes the hoops heavy and difficult to manipulate into position by persons assembling scaffolding.

20 **SUMMARY OF THE INVENTION**

What is required is a hoop which is lighter and easier to manipulate by persons assembling scaffolding.

25 According to the present invention there is provided a hoop for a safety cage assembly of a ladder which includes a rigid arcuate band having a first face, a second face, a first end and a second end. Means are provided for securing each of the first end and the second end to a ladder. A plurality of keyhole openings extend through the band between
30 the first face and the second face. A plurality of detachable tubing clamps are provided. Each of the tubing clamps has tubing receiving jaws defining a tubing receiving opening with an axis. The tubing receiving jaws have an exterior mounted projecting attachment key. In a first

orientation, the attachment key passes freely in and out through a selected one of the keyhole openings in the band. In a second orientation, the attachment key is locked within the selected keyhole opening and the tubing receiving jaws
5 are oriented with the axis of the tubing receiving opening positioned transversely in relation to the band.

The hoop, as described above, has detachable tubing clamps. This allows the hoop to be secured in position on the
10 ladder, prior to the tubing clamps being attached. This innovation facilitates installation. There is no danger of the tubing clamps becoming detached during use, as the scaffolding tubing maintains the tubing clamps in the second orientation with the attachment key locked in the keyhole.

15 Although beneficial results may be obtained through the use of the hoop, as described above, even more beneficial results may be obtained when each of the first end and the second end of the band terminate in sleeves. The sleeves are
20 oriented transversely in relation to the band and are adapted to slide over an end of a ladder. The sleeves serve as an effective and light weight means of securing the hoop to a ladder.

25 **BRIEF DESCRIPTION OF THE DRAWINGS**

These and other features of the invention will become more apparent from the following description in which reference is made to the appended drawings, the drawings are
30 for the purpose of illustration only and are not intended to in any way limit the scope of the invention to the particular embodiment or embodiments shown, wherein:

FIGURE 1 is a front elevation view of a hoop for a safety cage assembly of a scaffolding ladder constructed in

accordance with the teachings of the present invention.

FIGURE 2 is a top plan view of the hoop illustrated in **FIGURE 1**.

5 **FIGURE 3** is a perspective view of the hoop illustrated in **FIGURE 1** installed on a ladder section.

FIGURE 4 is a top plan view of the receiving jaws of a detachable tubing clamp adapted to be detachably secured to the hoop illustrated in **FIGURE 1**.

10 **FIGURE 5** is a side elevation view of the detachable tubing clamp illustrated in **FIGURE 4**.

FIGURE 6 is a detailed top plan view of the hoop illustrated in **FIGURE 1** with the detachable tubing clamp illustrated in **FIGURE 4** attached.

15 **FIGURE 7** is a front elevation view of a scaffold cage assembly constructed using the hoop illustrated in **FIGURE 1**.

FIGURE 8 is a detailed exploded perspective view of a scaffolding clamp with attachment member in a first orientation in relation to the keyhole opening in the hoop illustrated in **FIGURE 1**.

20 **FIGURE 9** is a detailed rear elevation view of a scaffolding clamp with attachment member in a second orientation in relation to the keyhole openings in the hoop illustrated in **FIGURE 1**.

25

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The preferred embodiment, a hoop for a scaffold cage assembly for a scaffolding ladder generally identified by reference numeral 10, will now be described with reference to
30 **FIGURES 1** through **9**.

Structure and Relationship of Parts:

Referring to **FIGURE 2**, hoop 10 is in the form of a rigid arcuate band 12 having a first face 14, a second face 16, a

first end 18 and a second end 20. Referring to **FIGURE 1**, a plurality of keyhole openings 22 extend through arcuate band 12 from first face 14 to second face 16. Referring to **FIGURE 2**, first end 18 and second end 20 terminate in sleeves 36 which are oriented transversely in relation to band 12 and are adapted to slide over an end 40 of a ladder section 38. Sleeves 36 serve as the means for securing each of first end 18 and second end 20 to ladder section 38. Referring to **FIGURE 3**, as will hereinafter be further described, when sleeves 36 are slid over end 40 of ladder section 38, it positions hoop 10 transversely across ladder section 38.

Referring to **FIGURE 6**, there is illustrated a detachable tubing clamp 24. Referring to **FIGURE 4**, tubing clamp 24 has tubing receiving jaws 26 and an exterior mounted projecting attachment key 28. Tubing receiving jaws 26 define a tubing receiving opening 30. Referring to **FIGURE 6**, tubing receiving opening is closed by a closure portion 44 of tubing clamp 24 which spans between tubing receiving jaws 26. Referring to **FIGURE 8**, when tubing clamp 24 is in a first orientation, attachment key 28 passes freely in and out through a selected one of keyhole openings 22 in band 12. Referring to **FIGURE 9**, when tubing clamp 24 is in a second orientation attachment key 28 becomes locked within selected keyhole opening 22. Referring to **FIGURE 5**, when tubing clamp 24 is in the second orientation, tubing receiving opening 30 has an axis 32 that is transversely orientated to arcuate band 12. Referring to **FIGURE 6**, when scaffold tubing 34 is positioned in tubing receiving opening 30, tubing clamp 24 becomes locked in the second orientation and attachment key 28 can not be removed from keyhole opening 22.

Operation:

There will now be described how hoop 10 is used as part

of a scaffolding cage assembly with reference to **FIGURES 1** through **7**. Referring to **FIGURE 7**, there is illustrated a scaffolding cage assembly generally identified by reference numeral 100. Typically, several ladder sections 38 will be required. Each ladder section 38 has a male end 40 and a female end 42. Each female end 42 is slid over a corresponding male end 40 to mate the ladder sections in end to end relation. Referring to **FIGURE 7**, in the illustrated embodiment, four (4) hoops 10 are shown. Referring to **FIGURE 4**, a plurality of detachable tubing clamps 24 is used depending upon the number of hoops 10 chosen and the number and orientation of scaffold tubings 34 desired. Referring to **FIGURE 7**, four (4) scaffold tubings 34 in an evenly spaced and substantially parallel orientation to each other are shown. It will be understood that **FIGURE 7**, is a simplification for the purpose of illustration. In the illustrated embodiment, sixteen (4 X 4) detachable tubing clamps 24 would be required to erect the illustrated embodiment shown. It will be appreciated that many combinations of scaffold tubings 34 and hoops 10 may be selected resulting, in each case, in a different number of detachable tubing clamps 24 used. Referring to **FIGURE 3**, sleeves 36 at first end 18 and second end 20 of hoop 10 are positioned over end 40 of ladder section 38. Referring to **FIGURE 8**, attachment key 28 of each detachable tubing clamp 24 is positioned in a first orientation allowing it to pass freely through each selected keyhole opening 22. Referring to **FIGURE 9**, each tubing clamp 24 is turned to the second orientation. Referring to **FIGURE 5**, this results in a transverse orientation of axis 32 of tubing receiving openings 30 to band 12. Referring to **FIGURE 6**, scaffold tubing 34 are then positioned into each tubing receiving opening 30 to maintain tubing clamp 24 in the second orientation. Referring to **FIGURE 7**, scaffolding tubing 34 is

added to enclose hoops 10. Although only four sections of scaffolding tubing 34 have been illustrated, it will be appreciated that sufficient sections are used to completely enclose hoops 10. Referring to **FIGURE 6**, as each scaffold
5 tubing 34 is positioned within each tubing receiving opening 30 it is secured in place by closing and securing each tubing receiving opening 30 with closure portion 44 of tubing clamp 24. Referring to **FIGURE 7**, as shown in broken lines, a scaffold structure 46 is fixedly attached to and supports
10 scaffolding cage assembly 100, both distributing their weight at ground level 48.

In this patent document, the word "comprising" is used in its non-limiting sense to mean that items following the
15 word are included, but items not specifically mentioned are not excluded. A reference to an element by the indefinite article "a" does not exclude the possibility that more than one of the element is present, unless the context clearly requires that there be one and only one of the elements.

20

It will be apparent to one skilled in the art that modifications may be made to the illustrated embodiment without departing from the spirit and scope of the invention as hereinafter defined in the Claims.

**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

5

1. A hoop for a safety cage assembly of a ladder,
comprising:

a rigid arcuate band having a first face, a second face,
a first end and a second end;

10

means for securing each of the first end and the second
end to a ladder;

a plurality of keyhole openings extending through the
band between the first face and the second face; and

15

a plurality of detachable tubing clamps, each of the
tubing clamps having tubing receiving jaws defining a tubing
receiving opening with an axis, the tubing receiving jaws
having an exterior mounted projecting attachment key, in a
first orientation the attachment key passing freely in and
out through a selected one of the keyhole openings in the

20

band, in a second orientation the attachment key being locked
within the selected keyhole opening and the tubing receiving
jaws being oriented with the axis of the tubing receiving
opening positioned transversely in relation to the band.

25

2. The hoop as defined in Claim 1, wherein each of the first
end and the second end of the band terminate in sleeves, the
sleeves being oriented transversely in relation to the band
and being adapted to slide over an end of a ladder.

3. A scaffolding cage assembly, comprising in combination:
several ladder sections, each of the ladder
sections having a male end and a female end, such that the
female end is slid over the male end to mate the ladder
5 sections in end to end relation;

a plurality of hoops, each of the hoops consisting
of a rigid arcuate band having a first face, a second face, a
first end and a second end, a plurality of keyhole openings
extending through the band between the first face and the
10 second face, the first end and the second end of each band
terminating in sleeves, the sleeves being oriented
transversely in relation to the band and being slide over the
male end of a ladder, such that the sleeves secure the first
end and the second end of the band to the ladder;

15 a plurality of detachable tubing clamps, each of
the tubing clamps having tubing receiving jaws defining a
tubing receiving opening with an axis, the tubing receiving
jaws having an exterior mounted projecting attachment key, in
a first orientation the attachment key passing freely in and
20 out through a selected one of the keyhole openings in the
band, in a second orientation the attachment key being locked
within the selected keyhole opening and the tubing receiving
jaws being oriented with the axis of the tubing receiving
opening positioned transversely in relation to the band; and

25 scaffold tubing secured in the openings of the
tubing receiving jaws of the tubing clamps and extending
between the hoops.

FIG. 1

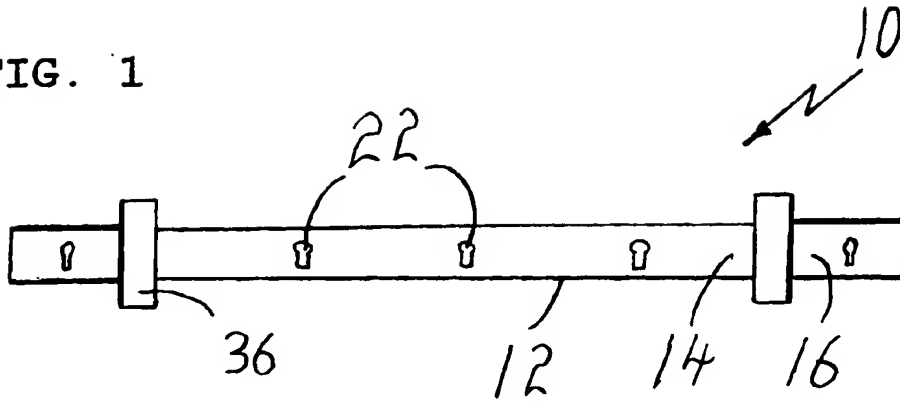


FIG. 2

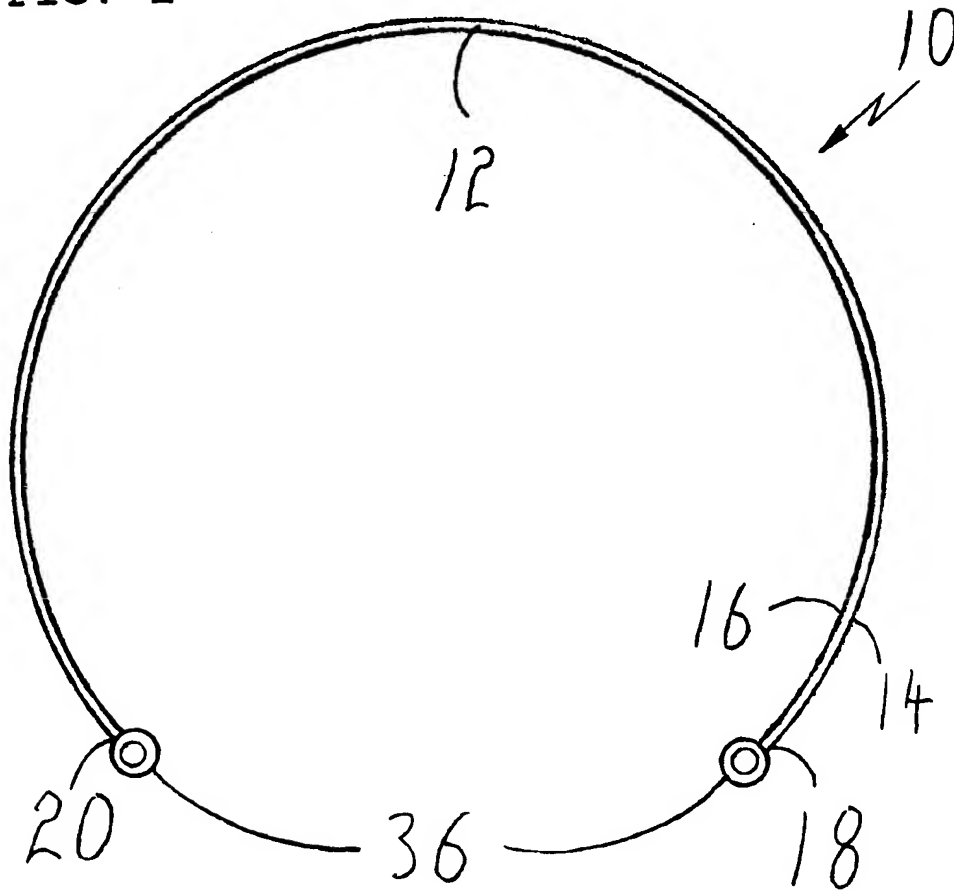


FIG. 3

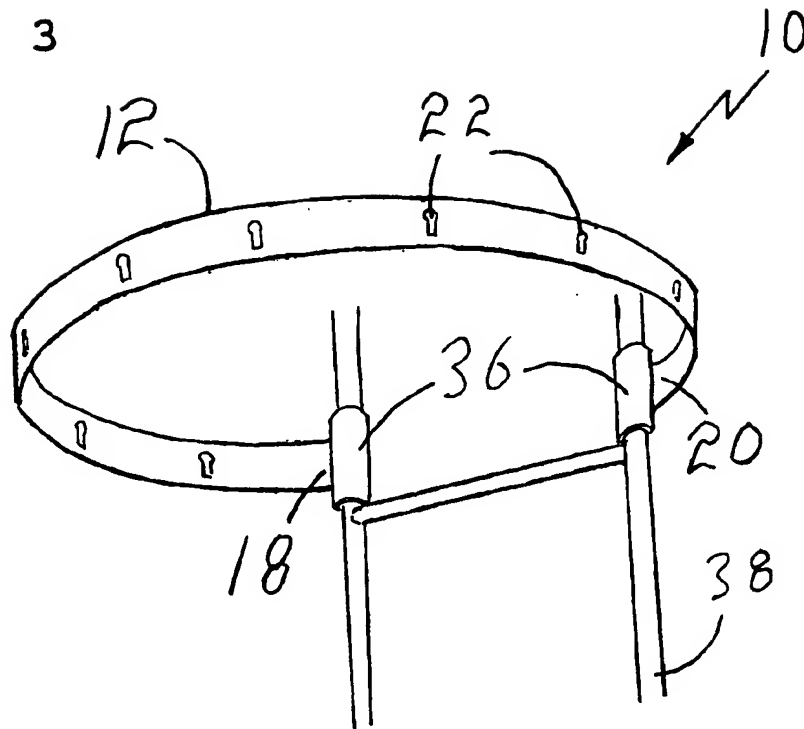


FIG. 4

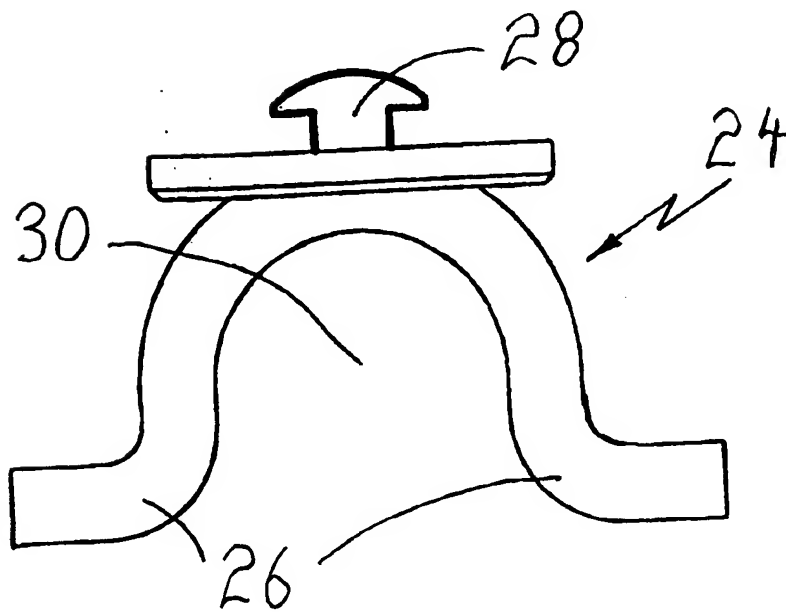


FIG. 5

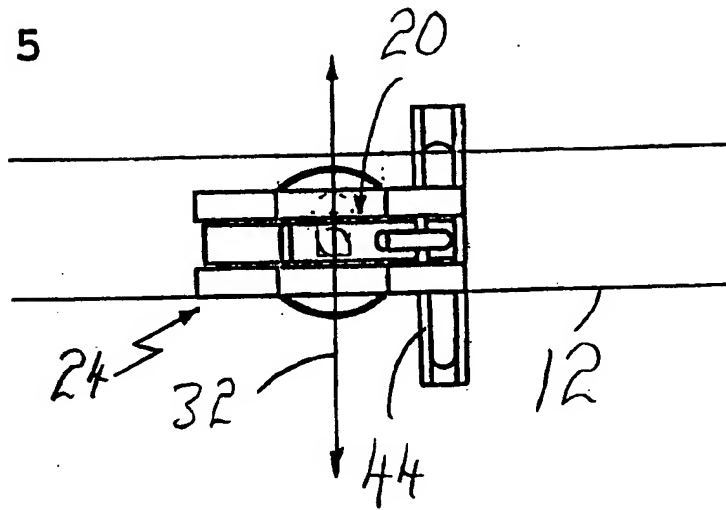


FIG. 6

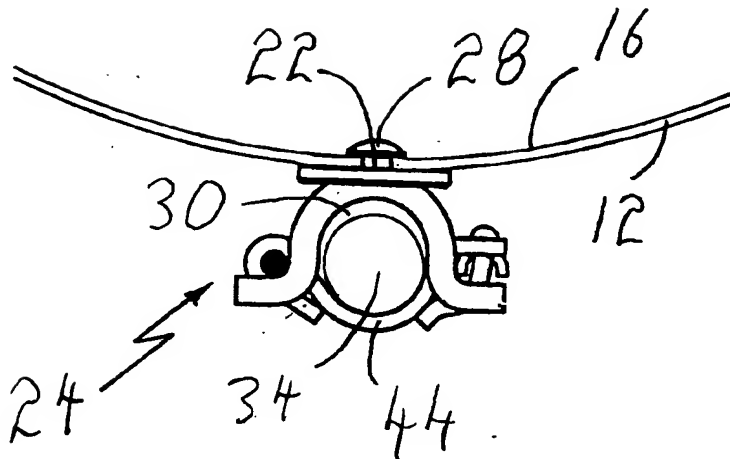


FIG. 7

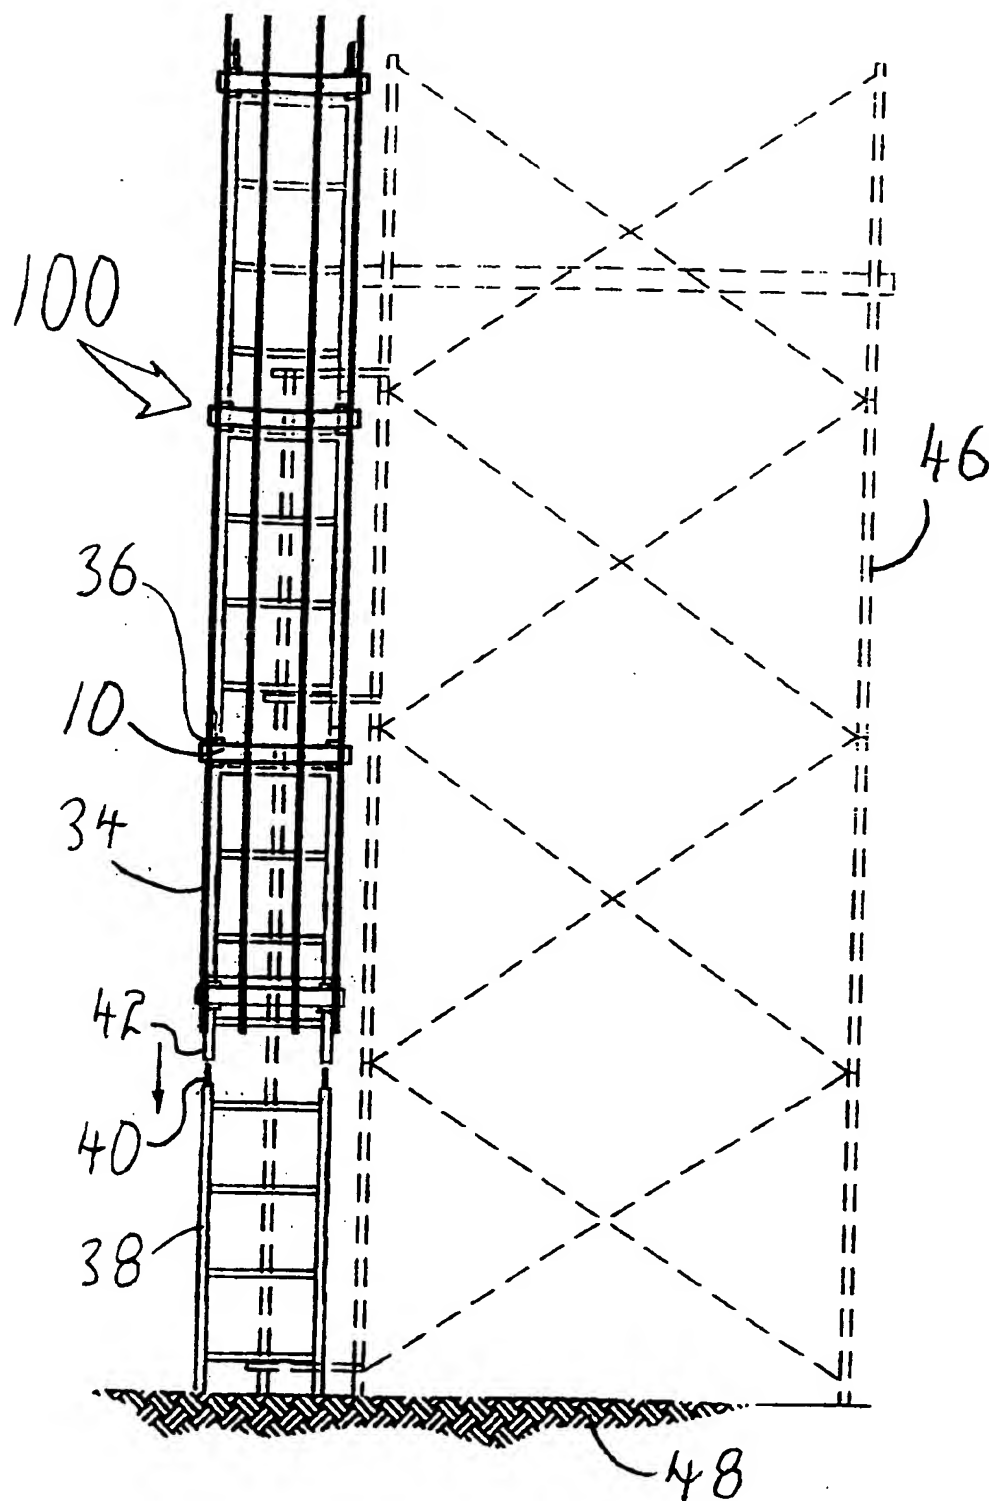


FIG. 8

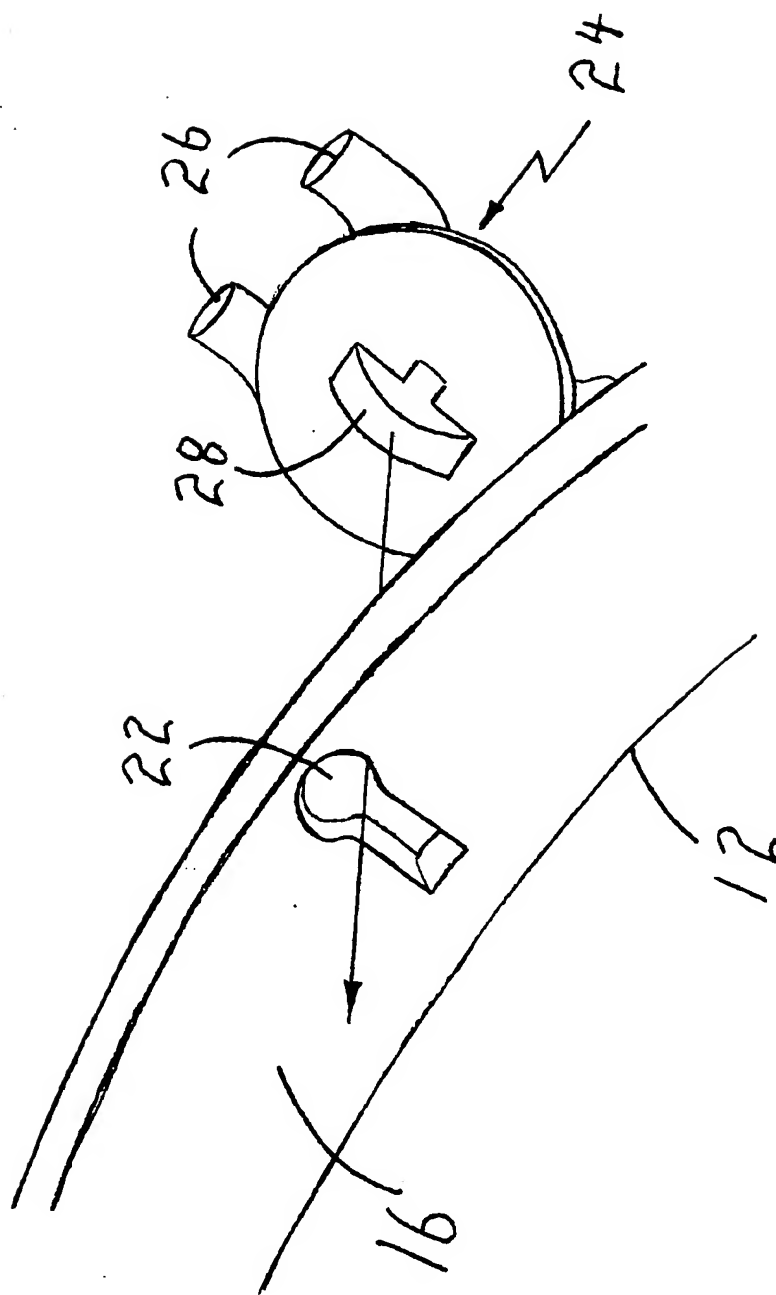


FIG. 9

